



2-WAY PILLAR HYDRANT c/w PRESSURE REDUCING VALVES Model PH-SQS 100VS-PRV (Designed to Vietnam Standards)

Pillar Hydrants are generally used, and connected to the water mains around the perimeters of buildings or roadsides.


During emergencies, the Fire Brigade or Fire Engines could draw water from the Pillar Hydrants to fight against any surrounding fire at the roadsides or nearby buildings.

Connecting Valves Outlets are specially designed to match typical Vietnam Standards.


Our range of products are manufactured in accordance to our ISO 9001 : 2015 Quality Management System.



Front View

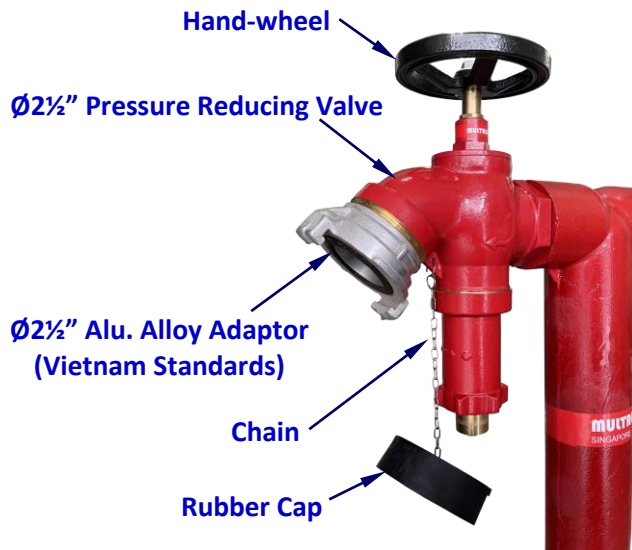

Pressure Reducing Valve Details

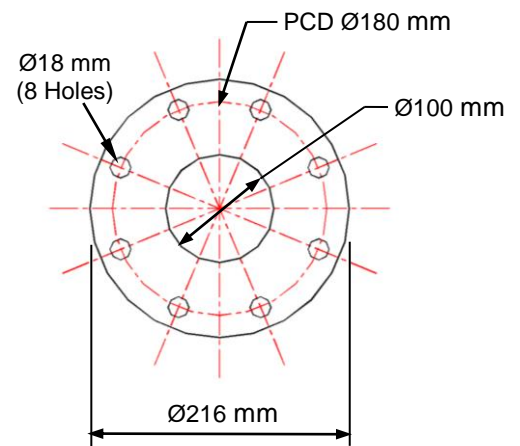

Ø 4" Inlet Flange Details (Table E, BS 10)

Model	PH-SQS 100VS-PRV
Body Material	Cast Iron to BS 1452 (Painted Red)
Inlet Size	Ø4" (DN 100mm) to Table E, BS 10 Flange
Outlet Connection	2 x Ø2½" Pressure Reducing Valve with Alu. Alloy Adaptor (Vietnam Standards)
Test Pressure	15 Bar
Working Pressure	10 / 16 Bar
Regulated Outlet Pressure	5 to 8 Bar
Weight	Approx. 35.5 kg

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building
Singapore 339 347

☎ : (65) 6395 6868 ✉ : info@multron.com
☎ : (65) 6395 6869 🌐 : www.multron.com



DATA SHEET

Copyright © The information contained in this Data Sheets remains the property of Multron Systems Pte Ltd, and is not to be altered or reproduced without permission. Multron reserves the right to change any specification without prior notice.