




ABC Dry Powder Trolley Fire extinguishers are suitable for mixed fire risk environments. This range offers a combination of fire performance and ease of service.

The trolley unit can be operated by one person and suitable for areas with high risk fire such as industrial facilities.

The cylinders are deep drawn from cold rolled steel with hot forged brass operating valve fitted with pressure indicator. Coated with epoxy powder, the cylinder offers high corrosion resistance.

Designed to EN 1866 requirement, and manufactured to our ISO 9001 Quality Management System.

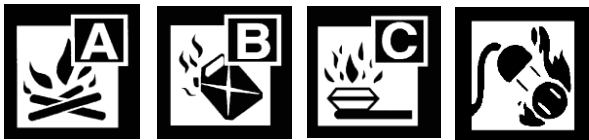

Typical Spray Nozzle
Material : ABS Plastic



Plan View

Model	EXT-ABC-25K	EXT-ABC-50K
Filled Capacity	25 kg	50 kg
Approx. Gross Wt.	50 kg	83 kg
Dimension A	380 mm	420 mm
Dimension B	460 mm	520 mm
Dimension H1	885 mm	1100 mm
Dimension H2	1020 mm	1200 mm
Diameter D	Ø252 mm	Ø298 mm
Discharge Range	8 – 10 metres	
Operating Temp.	-20°C to 55 °C	
Working Pressure	15 bar	
Test Pressure	25 bar	
Wheel Size	Ø240 mm x 32 mm	
Hose Ø x Length	Ø25 mm x 5 metre	



Front View



Side View

Physical Dimension

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868
☎ 6395 6869

✉ info @ multron.com
🌐 www. multron. com

