




Carbon Dioxide Extinguishers are suitable for Class B and C risks involving flammable liquids and for electrical hazards. CO2 is harmless to electrical equipment and is ideal for modern offices, electronic risks, and fires caused by the combustion of liquids such as oils, fats, solvents etc.

Our range of Fire Extinguishers are manufactured under strict Quality Management System to ISO 9001 : 2008

### FEATURES

- Tested to remarkably high performance fire-ratings in accordance to BS EN3-7, and Singapore Standards SS 232 : 1999 Part 1 to 6.
- The cylinders are of Carbon Steel body, coated with epoxy powder for high corrosion resistance, and fitted with brass valves.
- Colour Coded for instant recognition
- Effective operation at both high and low temperature
- Ease of usage with no messy residue.

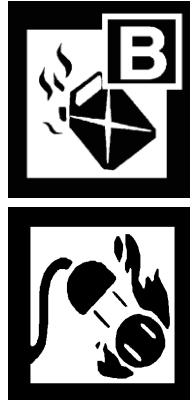

| Model No.         | CO2-EN3-2K  | CO2-EN3-5K   |
|-------------------|---|--------------|
| Capacity          | 2.0 kg  | 5.0 kg       |
| Approx. Gross Wt. | 7.8 kg  | 17.2 kg      |
| Discharge Time    | 14 secs   | 15 secs      |
| Throw Range       | 4 m   | 4 m          |
| Fire Rating       | 34B / C   | 55B / C      |
| Diameter x Height | Ø125 x 515mm  | Ø164 x 660mm |
| Working Pressure  | 50 bar @ 20°C   |              |
| Test Pressure     | 250 bar   |              |
| Temp. Range       | Operational between -20°C to +60°C  |              |
| Finishing         | Red – Epoxy Powder Coated   |              |
| Standard          | Designed & Manufactured to BS-EN 3-7 : 2004 + A1 : 2007, and Singapore Standards SS232 : 1999 Part 1 to 6 |              |

### Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868  
☎ 6395 6869

✉ info @ multron.com  
🌐 www. multron. com

