




Most Fire Detectors (eg. Smoke or Heat Detectors) are already provided with LED Indicators on the detectors itself to indicate 'Alarm' during fire. However, in many instances the detectors are mounted in concealed spaces or location with access difficulties whereby the LED Indicators are not easily visible. The Detector Remote Alarm Indicator model DET RL-03 provides the solution by having a remote indication corresponding to the detector at a suitable location where it is easily visible to the occupants

- Electronically designed to suit most major brands of Smoke or Heat Detectors remote output.
- Extra bright LED is used for good visibility.
- The Detector Remote Indicator uses a round ABS Plastic Plate with mounting holes to suit standard BS round conduit boxes, suitable for both wall and ceiling mounting.




**Detector Remote Alarm Indicator
Model : DET-RL-03**

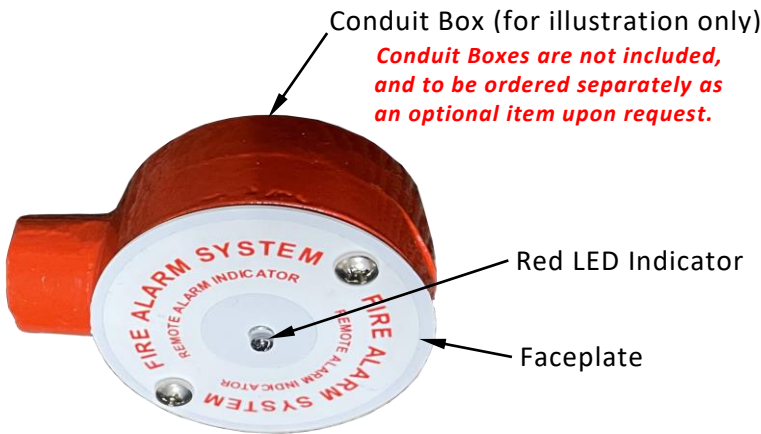

Typical Installation of Detector Remote Alarm Indicator

Model	DET-RL-03
Power Source	From Detector Remote Output <i>(DO NOT apply any unregulated DC power supply directly, as it may cause damage to the device)</i>
Operating Voltage	2 to 3VDC <i>(Depending on the Detector output)</i>
Operating Current	≤ 10 mA <i>(Depending on the Detector output)</i>
Operating Temp.	- 10 °C to + 50 °C
Relative Humidity	95%
Dimensions	Ø66mm x 2mm thick (32mm thick if fitted with conduit box)
Weight	Approx. 15g

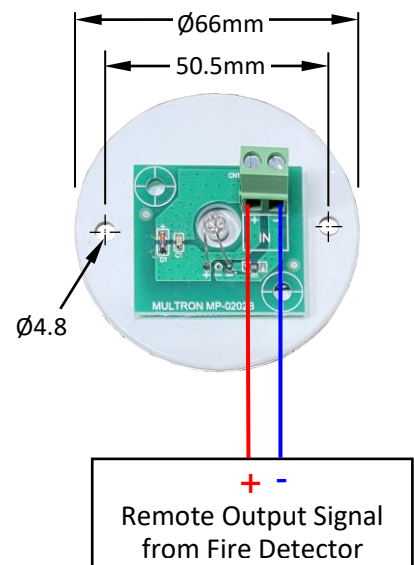

Typical Termination Diagram

Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868

✉ info@multron.com

☎ 6395 6869

🌐 www.multron.com

