



| TECHNICAL SPECIFICATIONS :- | | |
|-----------------------------|---|-----------------------------------|
| Strobe Model | AVD-C501 (<input type="checkbox"/> Clear Lens) | |
| Operating Voltage | 24VDC ±10% | |
| Current Consumption | ≤ 36 mA (Flashing During Activation) | |
| Flash Rate | 72 flashes per minute (± 10%) | |
| Operating Temp. Range | -10°C to +50°C | |
| Relative Humidity | ≤ 95%, No Condensation | |
| Ingress Protection | IP52 | |
| Weight (Complete Unit) | 232 gram | |
| Material | Strobe Light | ABS Plastic , with Plexiglas Lens |
| | Mounting Plate | Galvanized Steel |
| | Back Box | ABS Plastic |




This Strobe Light is specially designed to complement our range of Fire Alarm Products both technically and aesthetically as a Visual Alarm Device.

The Strobe is with Clear Diffuser Lens of Plexiglas, using high luminance LED as the light source. It has a standard twist-on base with cable entries for ease of installation and mounting.

The complete unit comprises of the Strobe Light, Mounting Plate with 'FIRE' wording, and Back Box for applications where reliability and ease of installation are of prime importance.

- Electronically designed, 24VDC to suit most applications.
- High Luminance LED for extra brightness with low current consumption.
- Design in Compliance to Singapore Standard SS645 Clause 5.5.6 on Visual Alarm Devices.

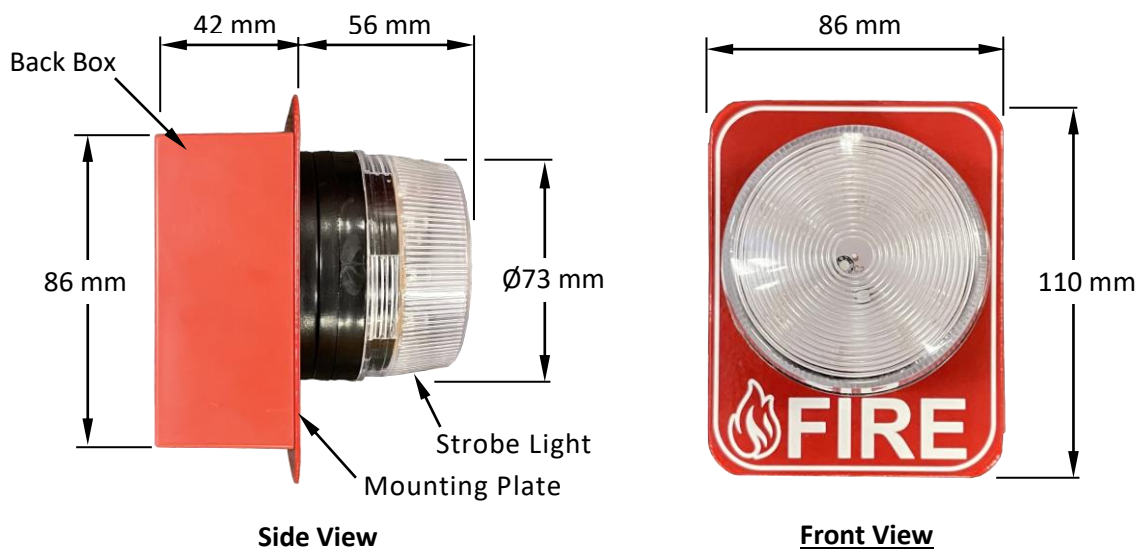

Typical Dimension of the Strobe Assembly