




DESCRIPTION	ALARM BELL MBA-624C
Material	Gong : Steel (Red) Housing : ABS Plastic
Operating Voltage	24Vdc (Polarized)
Voltage Range	20 to 28Vdc
Quiescent Current	0A
Alarm Current	≤ 30 mA
Sound Output Level	95 dB at 3m
Operating Temperature	0~ +65 °C
Operating Humidity	0~95% RH, non-condensing
Weight	



The MBA series Alarm Bells are low-current, audible signaling devices for use in Fire Alarm Systems and other signaling applications to provide warning during emergencies.

The Bells are polarized for usage with supervision circuitry, with low current, high efficiency DC motor to drive the striker. The Bell Gong is made of steel, finished in red enamel paint with the mechanism enclosed in an ABS plastic housing.

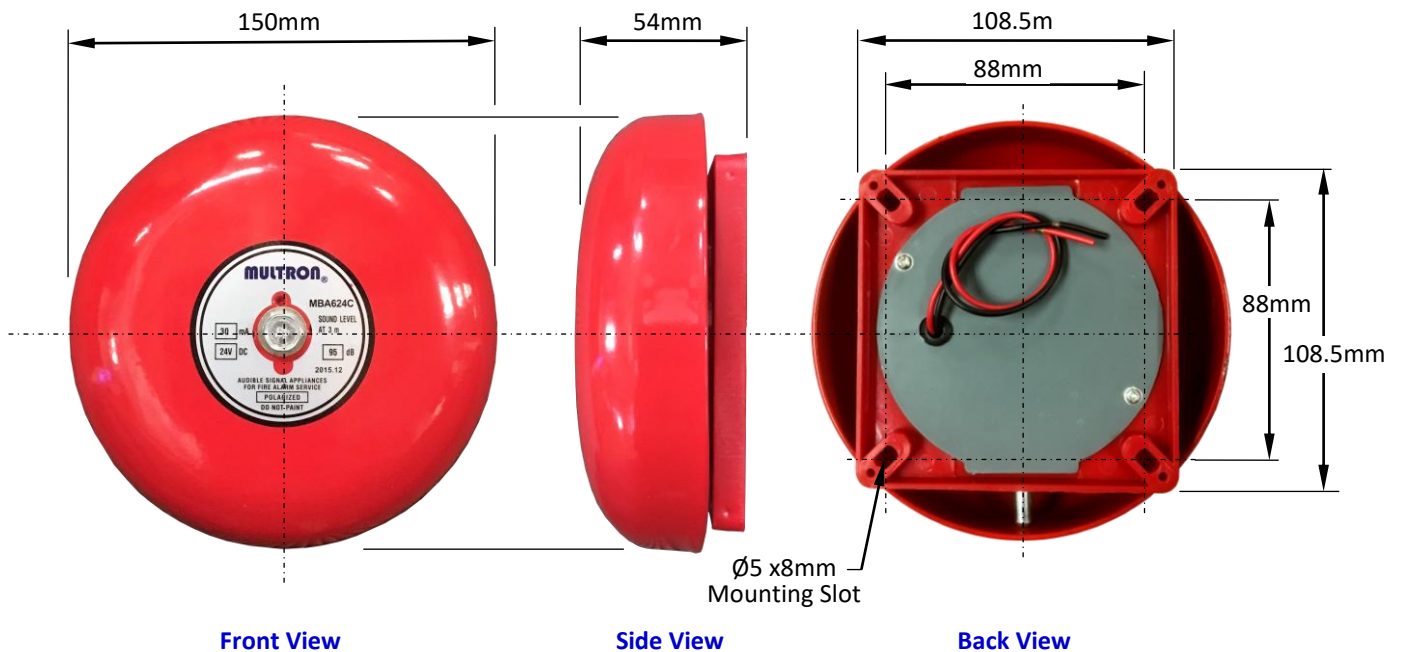

### Multron Systems Pte Ltd

217 Kallang Bahru, Multron Building, Singapore 339 347

☎ 6395 6868  
☎ 6395 6869

✉ info@multron.com  
🌐 www.multron.com

